


Prüfbericht-Nr.: <i>Test Report No.:</i>	SHI50033 001	Auftrags-Nr.: <i>Order No.:</i>	244329563	Seite 1 von 9 Page 1 of 9	
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	Apr.16, 2021		
Auftraggeber: <i>Client:</i>	Changzhou TSR Gas Spring Co., Ltd. No.1 Longrui Road, Development area of high-tech, Wujin District, Changzhou, Jiangsu, P.R. China Email:jjflant@lantchina.com, TEL:15861132200				
Prüfgegenstand: <i>Test item:</i>	Tapered pressure tubes for self-supporting gas springs for the height adjustment of seating				
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	SKQ-A/B-25				
Auftrags-Inhalt: <i>Order content:</i>	Initial type test for TÜV-Mark Approval				
Prüfgrundlage: <i>Test specification:</i>	EN 16955:2017 Hardware for furniture - Tapered pressure tubes for self-supporting gas springs for the height adjustment of seating - Test methods and requirements for strength and durability				
Wareneingangsdatum: <i>Date of receipt:</i>	Mar.28, 2021				
Prüfmuster-Nr.: <i>Test sample No.:</i>	20210328-01				
Prüfzeitraum: <i>Testing period:</i>	Apr.16, 2021 - Apr.26, 2021				
Ort der Prüfung: <i>Place of testing:</i>	Shanghai				
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shanghai) Co., Ltd.				
Prüfergebnis*: <i>Test result*:</i>	Pass				
geprüft von / tested by:		kontrolliert von / reviewed by:			
2021.04.26 Jason Gu / Test engineer		2021.05.12 Steven Lu / Reviewer			
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>
Sonstiges / Other:					
Test samples were prepared and sent by Manufacturer: Changzhou TSR Gas Spring Co., Ltd.					
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>			Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested					
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

Prüfbericht-Nr.: SHI50033 001
Test Report No.:


Liste der verwendeten Prüfmittel
List of used test equipment

Prüfmittel <i>Test equipment</i>	Prüfmittel-Nr. / ID-Nr. <i>Equipment No. / ID-No.</i>	Nächste Kalibrierung <i>Next calibration</i>
Digital caliper	I05-001	2021.07.14
Durability test machine	I05-SL-001	2021.09.14
Magnetic particle flaw Detector	NDT-17	2021.05.07

Prüfbericht-Nr.: SHI50033 001
Test Report No.:

Seite 3 von 9
Page 3 of 9

Produktbeschreibung
Product description

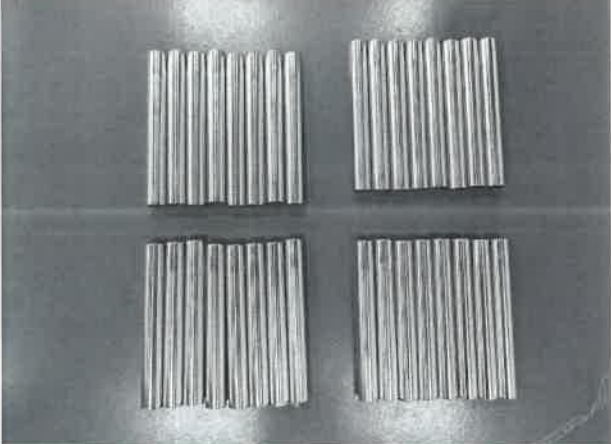1	Produktdetails <i>Product details</i>	Tapered pressure tubes for self-supporting gas springs for the height adjustment of seating Type: SKQ-A/B-25 Material: Q235B according to GB/T 31315-2014 Outside diameter: 28mm Wall thickness: 2.5mm Surface finish: Hard chrome plated
2	Maße / Gewicht <i>Dimensions / Weight</i>	
3	Bedienelemente <i>Operating elements</i>	N/A
4	Ausstattung / Zubehör <i>Equipment / Accessories</i>	N/A
5	Verwendete Materialien <i>Used materials</i>	Q235B according to GB/T 31315-2014
6	Sonstiges <i>Other</i>	Manufacturer of tubes: Changzhou TSR Gas Spring Co., Ltd. Date of production of the pressure tubes: March, 2021
Samples before testing		
		

Prüfbericht-Nr.: SHI50033 001
Test Report No.:


Absatz	EN 16955:2017	Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation

1	<p>Scope</p> <p>This European Standard specifies test methods and requirements for the strength and durability of tapered pressure tubes for self-supporting gas springs for the height adjustment of seating.</p> <p>Annex A (normative) contains product information.</p> <p>Annex B (informative) contains a guide for choosing the correct strength class.</p>															
2	<p>Normative references</p> <p>The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.</p> <p>EN ISO 4288, Geometrical product specifications (GPS) - Surface texture: Profile method - Rules and procedures for the assessment of surface texture (ISO 4288)</p> <p>EN ISO 7500-1:2016, Metallic materials - Verification of static uniaxial testing machines - Part 1: Tension/compression testing machines - Verification and calibration of the force-measuring system (ISO 7500-1)</p> <p>EN ISO 9934-2, Non-destructive testing - Magnetic particle testing - Part 2: Detection media (ISO 9934-2)</p> <p>ISO 1099, Metallic materials - Fatigue testing - Axial force-controlled method</p>															
3	<p>Terms and definitions</p> <p>Not applicable.</p>															
4	<p>Strength classes for pressure tubes</p> <p>The determination of the strength classes is based on characteristics given in Table 1. The dimension <i>u</i> of the seating is given in Figure 1.</p> <p style="text-align: center;">Table 1 — Strength classes for pressure tubes</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th style="text-align: center;">Strength class^a</th> <th style="text-align: center;">Alternate bending moment</th> <th style="text-align: center;">Largest distance between load bearing structure of the seat and centre of the column</th> </tr> <tr> <td></td> <td style="text-align: center;"><i>M</i> Nm</td> <td style="text-align: center;"><i>u</i> mm</td> </tr> </thead> <tbody> <tr> <td style="text-align: center;">2</td> <td style="text-align: center;">±190</td> <td style="text-align: center;">≤ 340</td> </tr> <tr> <td style="text-align: center;">3</td> <td style="text-align: center;">±210</td> <td style="text-align: center;">≤ 370</td> </tr> <tr> <td style="text-align: center;">4</td> <td style="text-align: center;">±240</td> <td style="text-align: center;">≤ 400</td> </tr> </tbody> </table> <p>^a Due to increased requirements, strength class 1 is not part of this European Standard.</p>	Strength class ^a	Alternate bending moment	Largest distance between load bearing structure of the seat and centre of the column		<i>M</i> Nm	<i>u</i> mm	2	±190	≤ 340	3	±210	≤ 370	4	±240	≤ 400
Strength class ^a	Alternate bending moment	Largest distance between load bearing structure of the seat and centre of the column														
	<i>M</i> Nm	<i>u</i> mm														
2	±190	≤ 340														
3	±210	≤ 370														
4	±240	≤ 400														

Prüfbericht-Nr.: SHI50033 001
Test Report No.:

Seite 5 von 9
Page 5 of 9

Absatz	EN 16955:2017	Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation

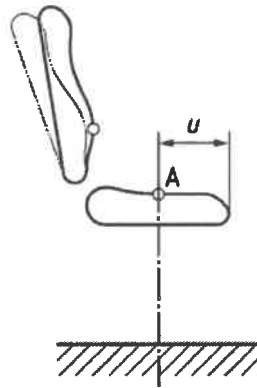

Key

A mid of centre column

u largest distance between load bearing structure of the seat and centre of the column

Figure 1 — Largest distance u between load bearing structure of the seat and centre of the column

5	Test apparatus		
5.1	<p>Material testing machine</p> <p>A material testing machine capable of performing tests in accordance with ISO 1099 shall be used. The testing machine force measuring system shall be verified statically in accordance with EN ISO 7500-1:2016, Class 1.</p>		P <input checked="" type="checkbox"/> F <input type="checkbox"/> N/A <input type="checkbox"/> N/T <input type="checkbox"/>
5.2	<p>Testing equipment for magnetic powder flaw test</p> <p>A testing equipment for magnetic powder flaw test for the particle inspection for the detection of surface imperfections shall be used.</p>		P <input checked="" type="checkbox"/> F <input type="checkbox"/> N/A <input type="checkbox"/> N/T <input type="checkbox"/>
6	Test		
6.1	<p>General</p> <p>For each combination of dimensions, production procedure, surface finish, materials or condition of the material or any other characteristic, which affects the strength and durability, a separate test shall be conducted.</p>		P <input checked="" type="checkbox"/> F <input type="checkbox"/> N/A <input type="checkbox"/> N/T <input type="checkbox"/>


Prüfbericht-Nr.: SHI50033 001
Test Report No.:

Seite 6 von 9
Page 6 of 9

Absatz	EN 16955:2017	Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation

6.2	Strength and durability		
6.2.1	Sampling The test samples shall consist of 32 pressure tubes taken on a random basis from the series production. Any kind of marking on the pressure tube shall be done before strength and durability test.		P <input checked="" type="checkbox"/> F <input type="checkbox"/> N/A <input type="checkbox"/> N/T <input type="checkbox"/>
6.2.2	Test procedure		
6.2.2.1	Test setup The test setup is shown in Figure 2. The end of the pressure tube shall be firmly fixed to the element which applies the load. If the element which applies the load is secured against coming loose by a counter-cone on the internal side of the pressure tube the free bending length l_5 shall be at least 50 % of the overlap l_3 (see Figure 2). The free length l_4 between the upper and lower clamps shall be at least 50 mm. If there are series-produced shapings, embossings etc. in the area of the bearing length of the pressure tube, these areas shall be included in the tests so that they are in the compression-tension zone. Exceptions to this are pressure tubes with shapings, embossings etc. which are up to 60 mm away from the lower end of the pressure tube.	Dimensions of the test fixture: according to the details supplied by the manufacturer of the pressure tubes Overlap l_3 in test fixture: 30.0mm~31.5mm	P <input checked="" type="checkbox"/> F <input type="checkbox"/> N/A <input type="checkbox"/> N/T <input type="checkbox"/>

Dimensions in millimetres

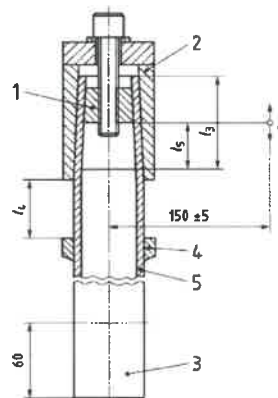

Key

- 1 counter-cone
- 2 element which applies the load
- 3 shapings and embossings permitted in this area without testing
- 4 lower clamp
- 5 pressure tube
- l_3 length of connection between the holding cone and the pressure tube cone
- l_4 free length between upper and lower clamp
- l_5 free bending length
- F test load

Tolerances: $\pm 0,5$ mm of the nominal dimensions, unless otherwise stated

Figure 2 -- Test setup for strength and durability

Prüfbericht-Nr.: SHI50033 001 Test Report No.:		Seite 7 von 9 Page 7 of 9	
Absatz	EN 16955:2017	Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation
6.2.2.2	<p>Test procedure</p> <p>The test shall be performed according to ISO 1099.</p> <p>The alternate bending moment M shall be as specified in Table 1. It shall act in parallel to the longitudinal axis of the pressure tube. The length of the lever arm which applies the force is (150 ± 5) mm. The time characteristic of the test force shall be sinusoidal. The stress cycle frequency shall not exceed 30 Hz. The alternate bending stress shall be applied with stress regulation. The temperature of the test piece shall not exceed 50 °C during the test.</p> <p>To determine the strength and durability, the alternate bending stresses shall be applied in 2×10^6 cycles and a mean stress of 0.</p>	<p>Alternate bending moment: ± 240 Nm</p> <p>Strength class: 4</p> <p>Cycle frequency: 10 Hz</p>	<p>P <input checked="" type="checkbox"/></p> <p>F <input type="checkbox"/></p> <p>N/A <input type="checkbox"/></p> <p>N/T <input type="checkbox"/></p>
6.2.3	<p>Evaluation and requirement</p> <p>After the test, the surfaces of the test pieces shall be subjected to a magnetic powder flaw test over their entire length and their entire circumference.</p> <p>The magnetic powder flaw test shall be performed on pressure tubes made of unalloyed and low-alloyed steels with alternating current magnetization. The test areas shall be cleaned and free of interfering impurities. Suitable test apparatus shall be used to ensure that a tangential field strength of at least 2 kA/m is achieved. Wet test media shall be used for the test. The particle size of the magnetic powder shall be according to EN ISO 9934-2.</p> <p>Only carrier liquids which do not cause any corrosion to the subject of the test shall be used. If oil is used as a carrier agent, the sort selected shall be easily removed and leave no interfering residue. Marked test oils are suitable.</p> <p>If water is used as a carrier agent, it can be necessary to use additives to ensure that the surface is properly wet (amount according to manufacturer's instructions). The detection sensibility shall not be impaired by these additives.</p> <p>The test is deemed to have been passed if no cracks or fractures are seen on any of the 32 pressure tubes tested.</p>		<p>P <input checked="" type="checkbox"/></p> <p>F <input type="checkbox"/></p> <p>N/A <input type="checkbox"/></p> <p>N/T <input type="checkbox"/></p>

Prüfbericht-Nr.: SHI50033 001 Test Report No.:		Seite 8 von 9 Page 8 of 9	
Absatz	EN 16955:2017	Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation
7	<p>Test report</p> <p>Each type test shall be documented in a test report.</p> <p>The test report shall contain at least the following information:</p> <ul style="list-style-type: none"> — address of testing laboratory; — date of testing; — date of production of the pressure tubes; — full description of the pressure tubes (e.g. type, material, surface finish, dimensions); — manufacturer of the pressure tubes; — dimensions of the test fixture (according to the details supplied by the manufacturer of the pressure tubes); — overlap l_3 in test fixture; — alternate bending moment and the strength class; — cycle frequency; — documentation of the test equipment and the test setup; — condition of the test pieces after the magnetic powder flaw test (fracture, visible crack lengths). 	<p>Condition of the test pieces after the magnetic powder flaw test: No fracture or visible crack</p>	<p>P <input checked="" type="checkbox"/></p> <p>F <input type="checkbox"/></p> <p>N/A <input type="checkbox"/></p> <p>N/T <input type="checkbox"/></p>
8	<p>Marking of the pressure tube</p> <p>The following shall be marked indelibly in a clearly visible place on each pressure tube:</p> <ul style="list-style-type: none"> — manufacturer; — type designation of the manufacturer; — reference to this European Standard and strength class (according to Table 1) (e.g. EN 16955-2). 		<p>P <input checked="" type="checkbox"/></p> <p>F <input type="checkbox"/></p> <p>N/A <input type="checkbox"/></p> <p>N/T <input type="checkbox"/></p>
<p>Annex A Product information (normative)</p> <p>→ See details in EN 16955:2017</p>			
<p>Annex B Guide for choosing the correct strength class (informative)</p> <p>→ See details in EN 16955:2017</p>			

Prüfbericht-Nr.: SHI50033 001
Test Report No.:

Seite 9 von 9
Page 9 of 9

Absatz	EN 16955:2017	Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation

Appendix I - Test Date Sheet

Serial sample no.	Serial bearing element no.	Cone angle α	Outside diameter (mm)	Wall thickness (mm)	Load alternation achieved (10^6)	Result of magnetic powder flaw test
1	1	1°26'16"	28.00	2.51	2.00	Pass
	2	1°26'16"	28.02	2.51	2.00	Pass
	3	1°26'16"	28.01	2.51	2.00	Pass
	4	1°26'16"	27.98	2.49	2.00	Pass
	5	1°26'16"	28.03	2.48	2.00	Pass
	6	1°26'16"	28.01	2.49	2.00	Pass
	7	1°26'16"	27.99	2.50	2.00	Pass
	8	1°26'16"	27.98	2.49	2.00	Pass
2	1	1°26'16"	28.02	2.49	2.00	Pass
	2	1°26'16"	27.97	2.49	2.00	Pass
	3	1°26'16"	28.02	2.49	2.00	Pass
	4	1°26'16"	28.03	2.48	2.00	Pass
	5	1°26'16"	28.00	2.50	2.00	Pass
	6	1°26'16"	27.99	2.48	2.00	Pass
	7	1°26'16"	28.03	2.49	2.00	Pass
	8	1°26'16"	27.99	2.48	2.00	Pass
3	1	1°26'16"	28.01	2.49	2.00	Pass
	2	1°26'16"	28.00	2.48	2.00	Pass
	3	1°26'16"	28.01	2.50	2.00	Pass
	4	1°26'16"	27.98	2.49	2.00	Pass
	5	1°26'16"	27.97	2.48	2.00	Pass
	6	1°26'16"	28.01	2.49	2.00	Pass
	7	1°26'16"	28.00	2.49	2.00	Pass
	8	1°26'16"	28.02	2.48	2.00	Pass
4	1	1°26'16"	27.97	2.49	2.00	Pass
	2	1°26'16"	28.01	2.51	2.00	Pass
	3	1°26'16"	27.97	2.50	2.00	Pass
	4	1°26'16"	27.98	2.48	2.00	Pass
	5	1°26'16"	28.00	2.50	2.00	Pass
	6	1°26'16"	27.99	2.51	2.00	Pass
	7	1°26'16"	28.00	2.51	2.00	Pass
	8	1°26'16"	27.97	2.51	2.00	Pass

----- End of Report -----